

Mobile loading RAMPS



Hidrotiltai
ADVANCED LOADING ASSISTANT



Feature, advantage, and benefit statement about product .

Mobile (yard) ramps – a versatile device used for loading trucks service when the warehouse floor level with the same access to the store level. As well as mobile ramp can be used as a bridge from the warehouse on a concrete access ramp (if any) or directly to the warehouse. Portable ramps can be equipped with a conveyor belt. This speeds up the bulk material handling. Mobile ramp easy to transport to any place in the territory using the forklift trucks. With the ramp truck connected by a special bond. Hydraulic control of the mobile ramps can be electric or manual. Mobile ramps suitable to loading for the maintenance and marine containers.

All ramps welded from steel S355.

CONTENT

- CONTENT _____ 1 page
- GALLERY _____ 2 page
- 6 tons . Manual operation _____ 3 page
- 6 tons . Electrohydraulic operation _ 4 page
- 6 tons. With integrated leveler _____ 5 page
- 7 tons capacity _____ 6 page
- 8 tons capacity _____ 7 page
- 9 tons capacity _____ 8 page
- 14 tons . With adjustable bridge _____ 9 page
- 14 tons. For agricultural machinery loading 10 page
- 3-sides loading ramp _____ 11 page






Mobile loading ramps Gallery



3



GALLERY



Antakalnio Str. 75-805,
LT-10007 Vilnius, LITHUANIA
www.hidrotiltai.lt

Phone: +370 2340014
GSM: +370 655 40001
E-mail: info@hidrotiltai.lt

Hidrotiltai
ADVANCED LOADING ASSISTANT



Mobile loading ramps


Loading capacity 6 tons manual operation



4

AVAILABLE OPTIONS

- Hidroelectrical operation
- Main platform with transporter stripe
- Main platform with rollgang
- Traffic light
- Optional color (standard **RAL 3020**).
- You company logo.

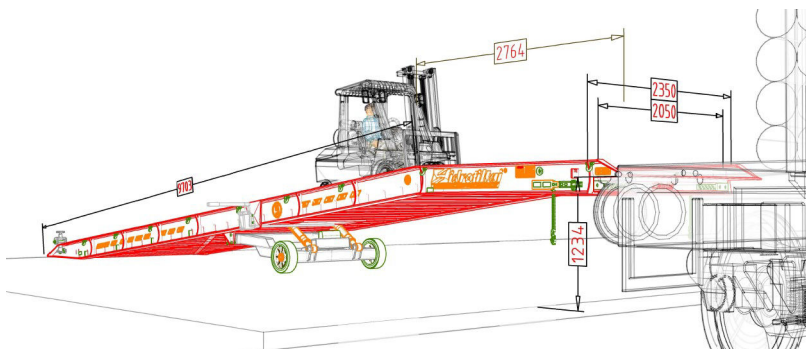

TECHNICAL SPECIFICATIONS

Made by standard	LST 1570-98
Capacity EN 1398 (kN)	60
Working pressure (MPa)	25
Working temperature °C	-25 +40
Oil	NESTE 32

ATTENTION: Attach the ramp to the truck before loading.

ADVANCED LOADING ASSISTANT

MR 6	Max point of rise	Min point of landing	Gauge width	Trail width	Restrain length	Bridge length	Max load
	H (mm)	h (mm)	B(mm)	b(mm)	L(mm)	R(mm)	G(kg)
MR6-1800	1650	800	2000	1800	9700	2760	6000
MR6-2100	1650	800	2300	2100	9700	2760	6000

DESCRIPTION



MR6-2100





Mobile loading ramps

Capacity 6 tons with electrohydraulic operation



5


DESCRIPTION

AVAILABLE OPTIONS

- Hidroelectrical operation
- Main platform with transporter stripe
- Main platform with rollgang
- Traffic light
- Optional color (standard RAL 5014).
- You company logo.

SPECIFICATIONS

Made by standard	LST 1570-98
Capacity EN 1398 (kN)	60
Working pressure (MPa)	25
Working temperature °C	-25 +40
Oil	NESTE 32
Oil tank capacity (dm3)	4

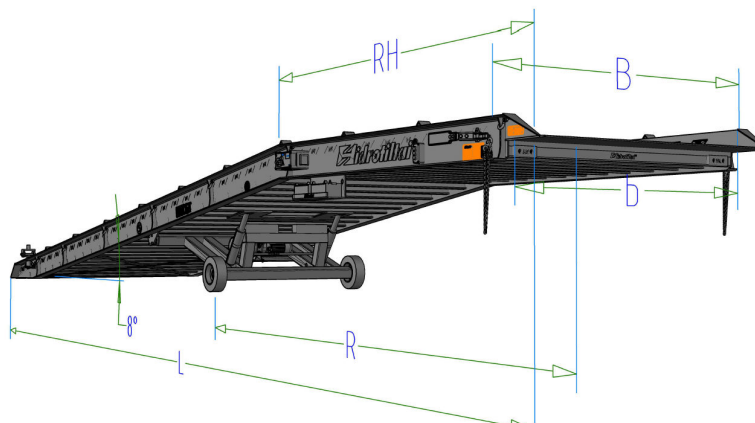


MR 6	Max point of rise H (mm)	Min point of landing h (mm)	Gauge width B(mm)	Trail width b(mm)	Restrain length L(mm)	Bridge length RH(mm)	Max load G(kg)
MR6E-2000	1450	850	2400	2200	8400	2460	6000
MR6E-2200	1450	850	2000	2000	8400	2460	6000

SCHEMA



ATTENTION: .Attach the ramp to the truck before loading.





Mobile loading ramps

With hydraulic integrated leveler


DIMENSIONS

- Whole length L= 8.8m
- Horizontal zone R=2.4m
- Leveler lip width l= 0.9m
- Track width b= 1.9m
- Optional color (standard RAL 3020).

CAPACITY 6T

TECHNICAL SPECIFICATIONS

Made by standard	LST 1570-98
Capacity EN 1398 (kN)	60
Working pressure (MPa)	25
Working temperature °C	-25 +40
Oil	NESTE 32
Oil tank capacity (dm3)	4

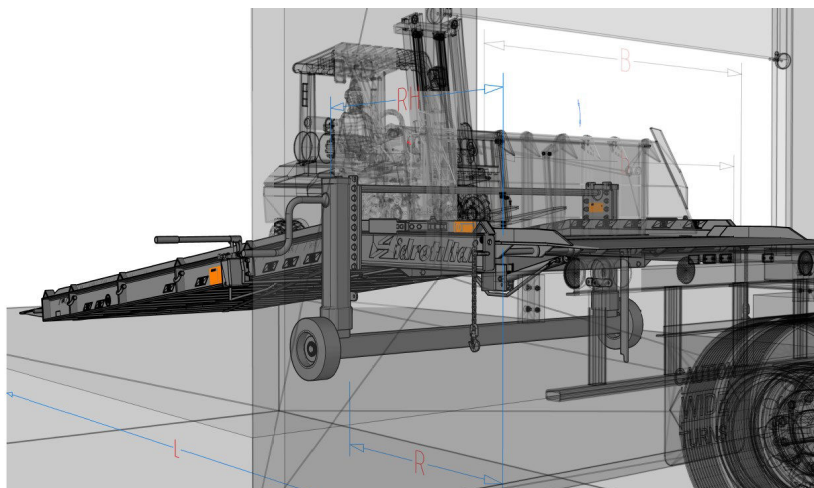

DESCRIPTION



PICTURES





Mobile loading ramps

Loading capacity 7 tons




7

AVAILABLE OPTIONS

- Hidroelectrical operation
- Main platform with transporter stripe
- Main platform with rollgang
- Traffic light
- Optional color (standard RAL 5014).
- You company logo.

TECHNICAL SPECIFICATIONS


Made by standard	LST 1570-98
Capacity EN 1398 (kN)	70
Working pressure (MPa)	25
Working temperature °C	-25 +40

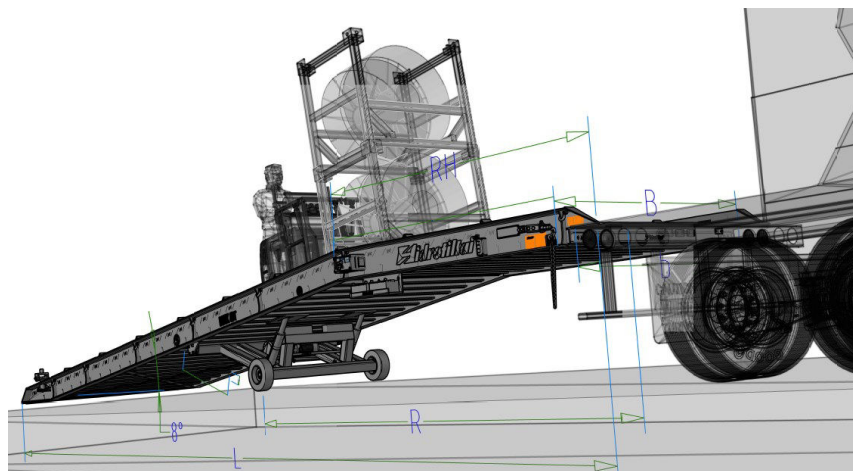

DESCRIPTION

MR 7	Max point of rise	Min point of landing	Gauge width	Trail width	Restraining length	Bridge length	Max load
	H (mm)	h (mm)	U(mm)	B(mm)	L(mm)	RH(mm)	G(kg)
MR7-2000	1450	850	2400	2200	8400	2460	7000
MR7-2200	1450	850	2000	2000	8400	2760	7000

PHOTO

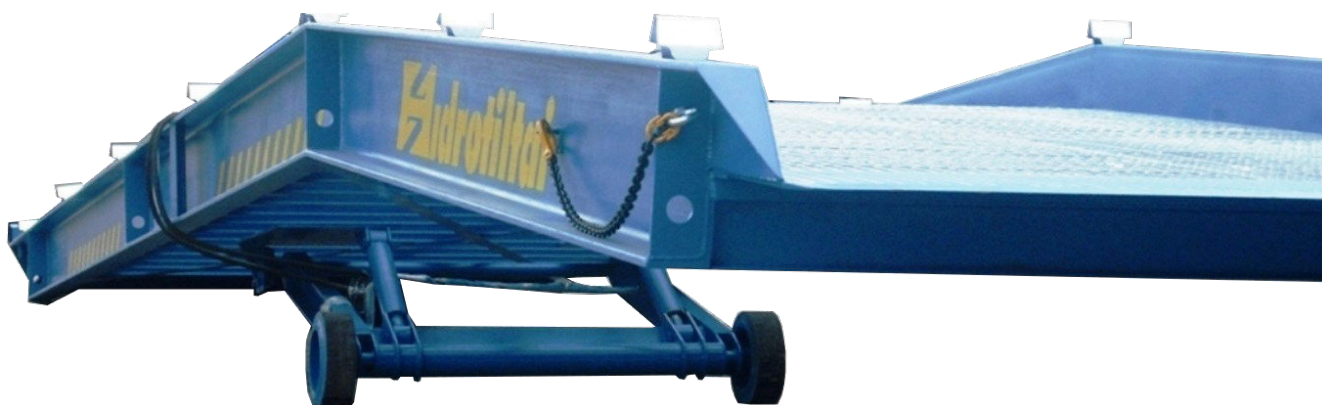



Mobile loading ramps

Loading capacity 8 tons




8

AVAILABLE OPTIONS

- Hidroelectrical operation
- Main platform with transporter stripe
- Main platform with rollgang
- Traffic light
- Optional color (standard RAL 5014).
- You company logo.

TECHNICAL SPECIFICATIONS

Made by standard	LST 1570-98
Capacity EN 1398 (kN)	80
Working pressure (MPa)	25
Working temperature °C	-25 +40
Oil	NESTE 32

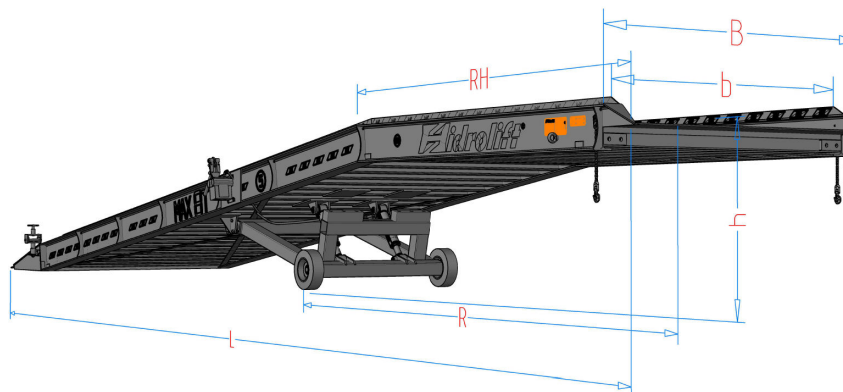


MR 8	Max point of rise	Min point of landing	Gauge width	Trail width	Restrain length	Bridge length	Max load
	H (mm)	h (mm)	U(mm)	B(mm)	L(mm)	RH(mm)	G(kg)
MR8-2000	1450	850	2400	2200	11400	2460	8000
MR8-2200	1450	850	2000	2000	11800	2860	8000

DESCRIPTION



Attachment element

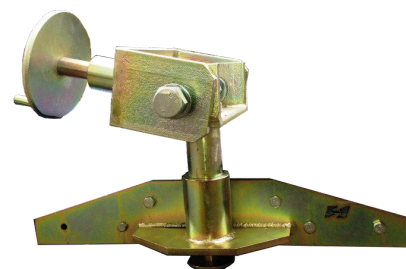

PHOTOS





Mobile loading ramps

Loading capacity 9 tons



9


DESCRIPTION

AVAILABLE OPTIONS

- Hidroelectrical operation
- Main platform with transporter stripe
- Main platform with rollgang
- Traffic light
- Optional color (standard RAL 5014).
- You company logo.

TECHNICAL SPECIFICATIONS

Made by standard	LST 1570-98
Capacity EN 1398 (kN)	90
Working pressure (MPa)	25
Working temperature °C	-25 +40
Oil	NESTE 32
Oil tank capacity (dm3)	8

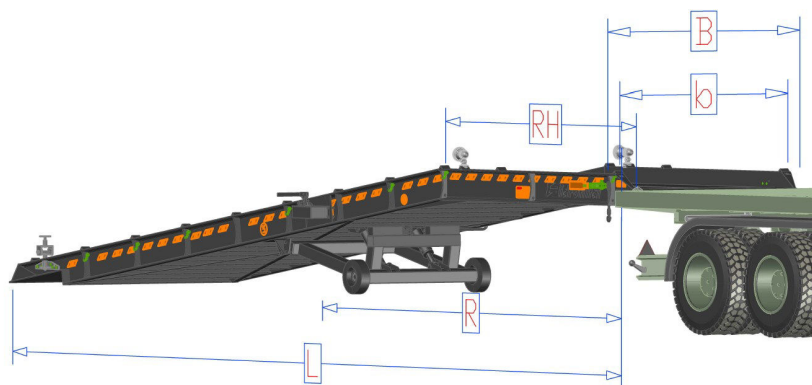

MR 9	Max point of rise	Min point of landing	Gauge width	Trail width	Restraining length	Bridge length	Max load
	H (mm)	h (mm)	U(mm)	B(mm)	L(mm)	R(mm)	G(kg)
MR9-2000	1450	850	2400	2200	12400	2460	9000
MR9-2200	1450	850	2000	2000	12800	2860	9000




PHOTO



Mobile loading ramps

With additional adjustable bridge.
Loading capacity 14 tons

DESCRIPTION

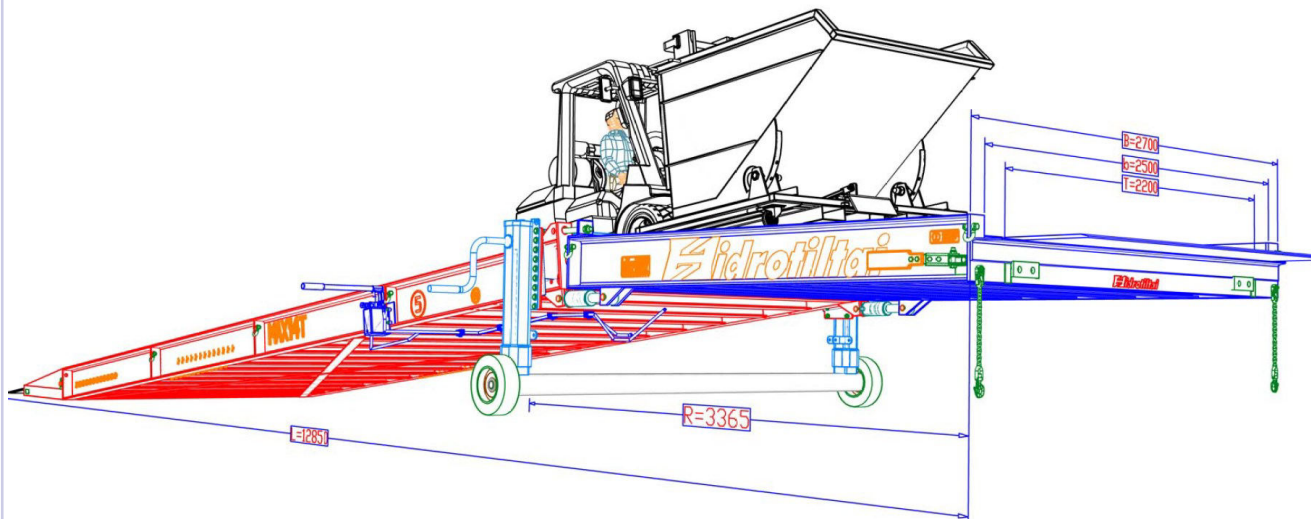

WIDE RANGE
LEVEL LIM-
ITS.

SUITABLE TO
LOAD MA-
RINE CON-
TAINERS
AND

TECHNICAL SPECIFICA-
TIONS

Made by standard	LST 1570-98
Capacity EN 1398 (kN)	140
Working pressure (MPa)	25
Working temperature °C	-25 +40
Oil	NESTE 32
Oil tank capacity (dm ³)	8

AVAILABLE OPTIONS

- Hydroelectrical operation
- Main platform with rollgang
- Traffic light
- Optional color (standard RAL 5014).
- You company logo.

PHOTO






Mobile loading ramps

Loading capacity 14 tons

MR14

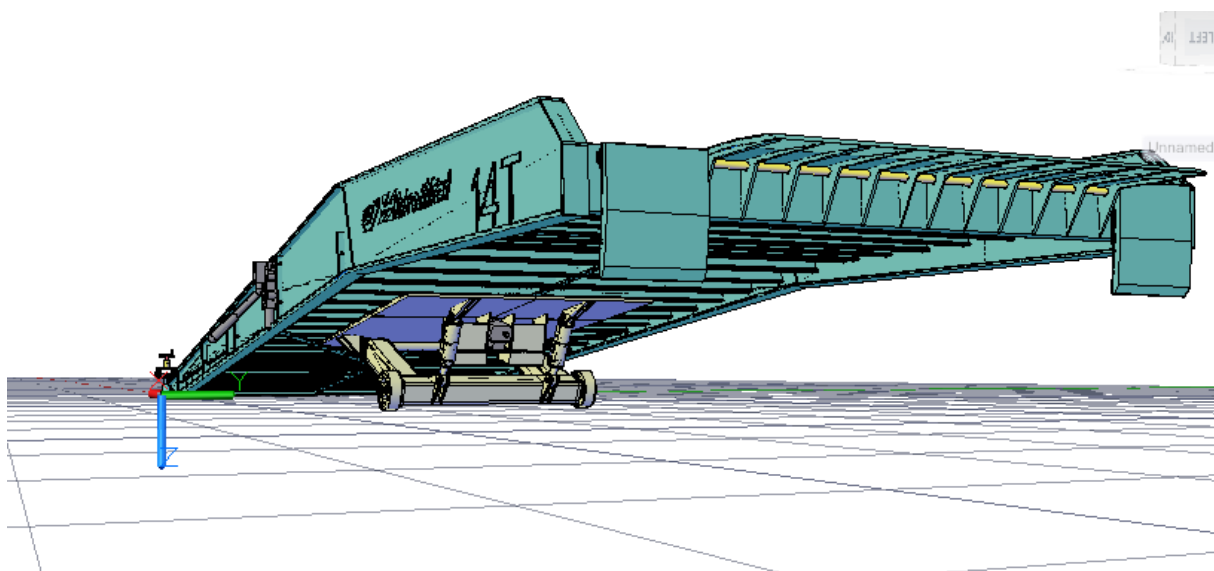

THE RAMP IS DESIGNED FOR LOADING AGRICULTURAL MACHINERY

PHOTO






Mobile loading ramps

3-sides loading. Loading capacity 6 tons




12

DESCRIPTION

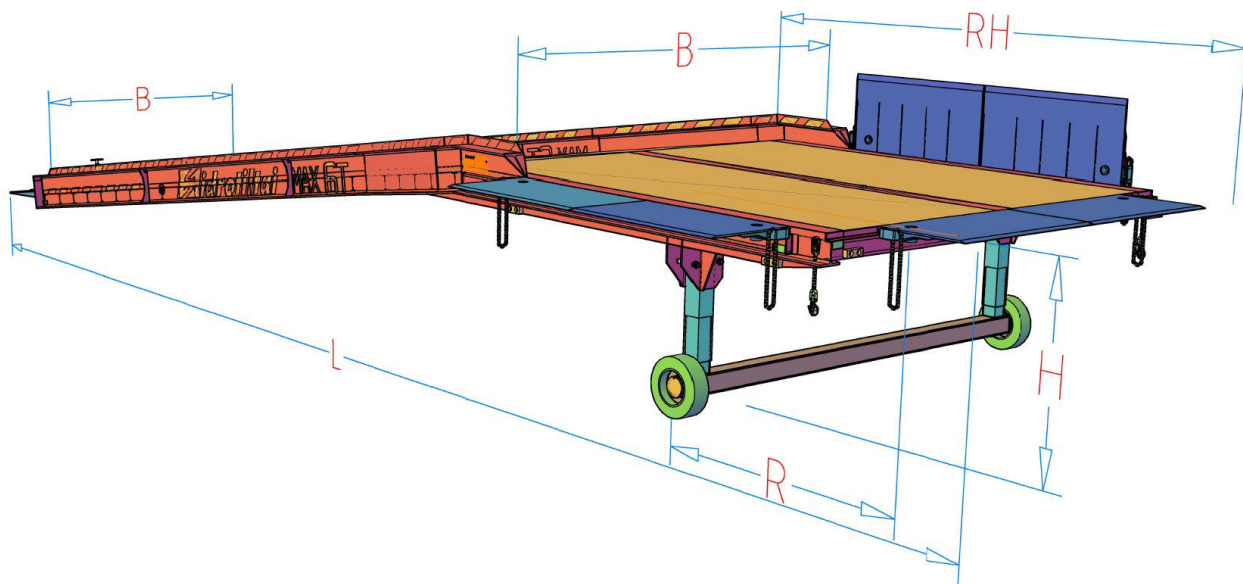


MR 8	Max point of rise	Min point of landing	Gauge width	At the mouth	Restrain lenght	Bridge lenght	Max load
	H (mm)	h (mm)	B(mm)	B(mm)	L(mm)	RH(mm)	G(kg)
3MR6-3200	1450	1150	2000	3250	11400	2760	6000
3-direction loading							

SCHEMA

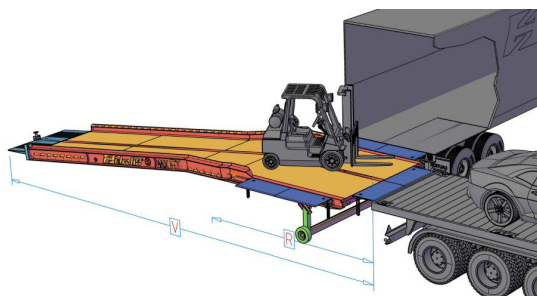

THE RAMP IS DESIGNED FOR
THREE-SIDES LOADING



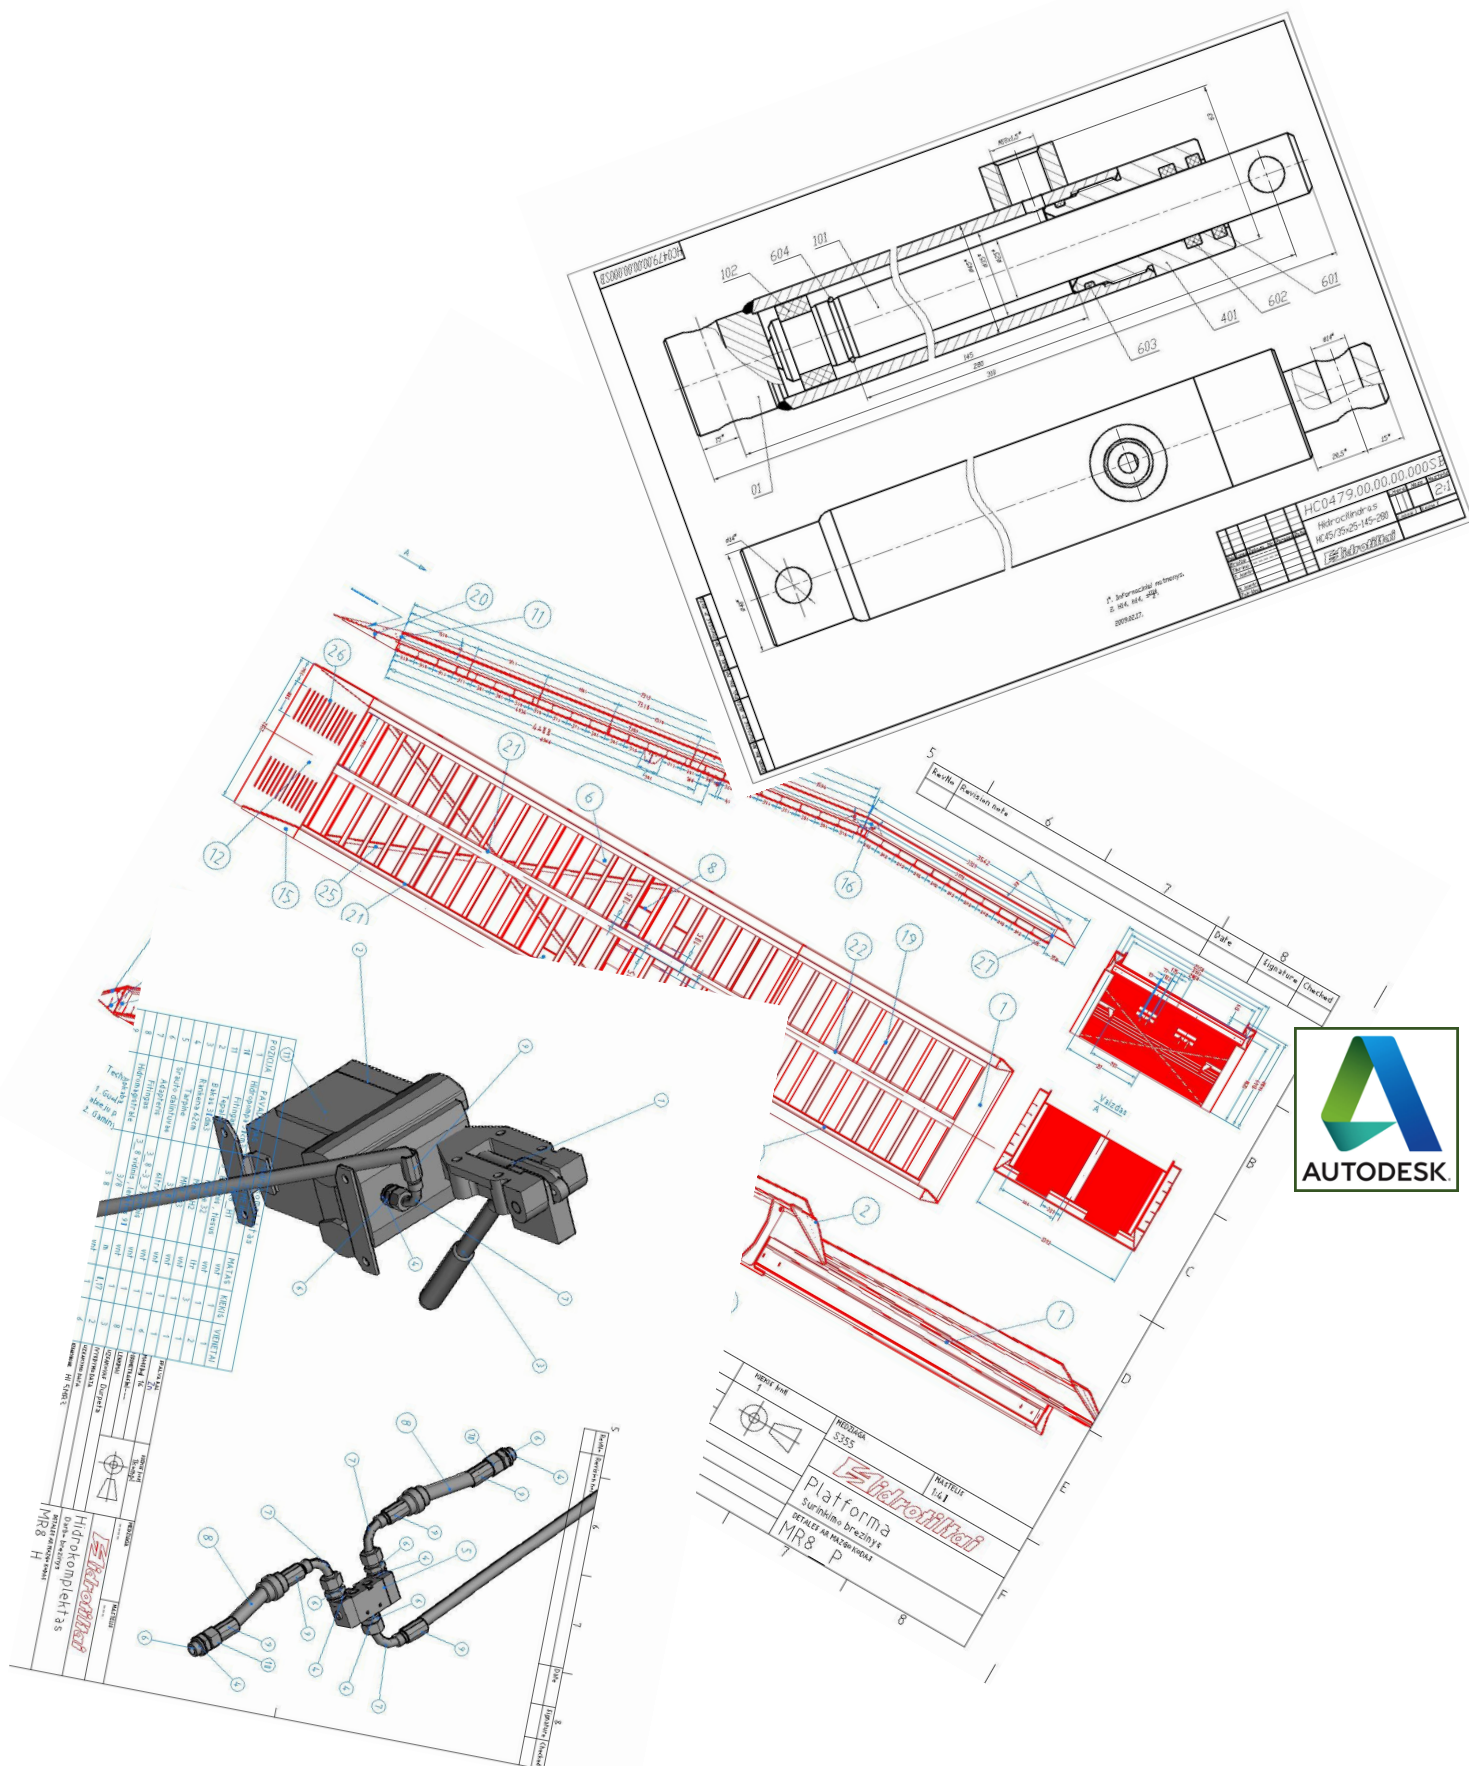

Antakalnio Str. 75-805,
LT-10007 Vilnius, LITHUANIA
www.hidrotiltai.lt

Phone: +370 2340014
GSM: +370 655 40001
E-mail: info@hidrotiltai.lt

Hidrotiltai
ADVANCED LOADING ASSISTANT