

► Mobile loading ramps

Authorized
of
LITHUANIA

Feature, advantage, and benefit statement about product .

Mobile (yard) ramps – a versatile device used for loading trucks service when the warehouse floor level with the same access to the store level. As well as mobile ramp can be used as a bridge from the warehouse on **a concrete** access ramp (if any) or directly to the warehouse. Portable ramps can be equipped with a conveyor belt. This **speeds** up the bulk material handling. Mobile ramp easy to transport to any place in the territory using the forklift trucks. With the ramp truck connected by a special bond. Hydraulic control of the mobile ramps can be electric or manual. Mobile ramps feel sorry for the maintenance and marine containers.

All ramps welded from steel S355.

CONTENT

- 5 tons capacity _____ 1 page
- 6 tons capacity _____ 2 page
- 6 tons capacity with electric operation_ 3 page
- 7 tons capacity _____ 4 page
- 8 tons capacity _____ 5 page
- 9 tons capacity _____ 6 page
- 10 tons capacity _____ 7 page
- 3– direction loading _____ 8 page

ADVANCED LOADING ASSISTANT



CAPACITY

- 6T
- 7T
- 8T
- 9T

MODELS

- With electrical operation
- Gear fitted
- 3-direction loading



MOBILE RAMPS

Phone: +370 655 40001
E-mail: info@hidrotiltai.lt
Web: www.hidrotiltai.lt

Antakalnio 50 , 55-asis pastas , p/d
805 , LT-10312 , Vilnius ,
LITHUANIA.



CE



Mobile loading ramps

GALLERY

Aidrotiltai
of
LITHUANA

DESCRIPTION



SCHEMA



MOBILE RAMPS

ADVANCED LOADING ASSISTANT

Phone: +370 655 40001
E-mail: info@hidrotiltai.lt
Web: www.hidrotiltai.lt

Antakalnio 50, 55-asis pastas, p/d
805, LT-10312, Vilnius,
LITHUANIA.



Mobile loading ramps

▶ Loading capacity 5 tons

Manufacturer
of
LITHUANIA


AVAILABLE OPTIONS

- Hidroelectrical operation
- Main platform with transporter stripe
- Main platform with rollgang
- Traffic light
- Optional color (standard RAL 5014).
- You company logo.

CAPACITY 5T

TECHNICAL SPECIFICATIONS

Made by standard	LST 1570-98
Capacity EN 1398 (kN)	50
Working pressure (MPa)	25
Working temperature °C	-25 +40
Oil	NESTE 32
Oil tank capacity (dm ³)	4

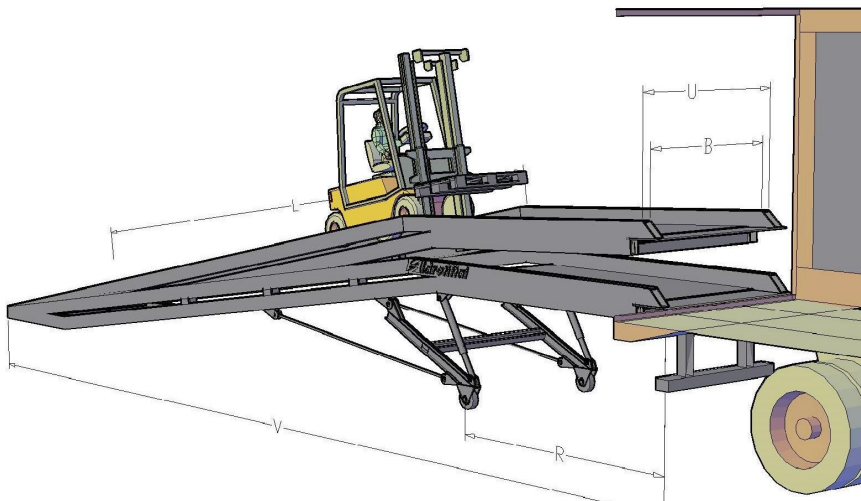

DESCRIPTION



MR 6	Max point of rise	Min point of landing	Gauge width	Trail width	Restrained length	Bridge length	Max load
	H (mm)	h (mm)	U(mm)	B(mm)	L(mm)	R(mm)	G(kg)
MR5-1500	1650	600	1700	1500	8400	2460	5000
MR5-1800	1650	600	2000	1800	8400	2460	5000



ATTENTION: .Attach the ramp to the truck before loading.

SCHEMA



WIDE RANGE OF HEIGHT LIMITS
SUITABLE TO LOAD MARINE CONTAINERS



MOBILE RAMPS

Phone: +370 655 40001
 E-mail: info@hidrotiltai.lt
 Web: www.hidrotiltai.lt

Antakalnio 50, 55-asis pastas, p/d
 805, LT-10312, Vilnius,
 LITHUANIA.



Mobile loading ramps

► Loading capacity 6 tons




AVAILABLE OPTIONS

- Hidroelectrical operation
- Main platform with transporter stripe
- Main platform with rollgang
- Traffic light
- Optional color (standard RAL 5014).
- You company logo.

CAPACITY 6T

TECHNICAL SPECIFICATIONS

Made by standard	LST 1570-98
Capacity EN 1398 (kN)	60
Working pressure (MPa)	25
Working temperature °C	-25 +40
Oil	NESTE 32
Oil tank capacity (dm ³)	4

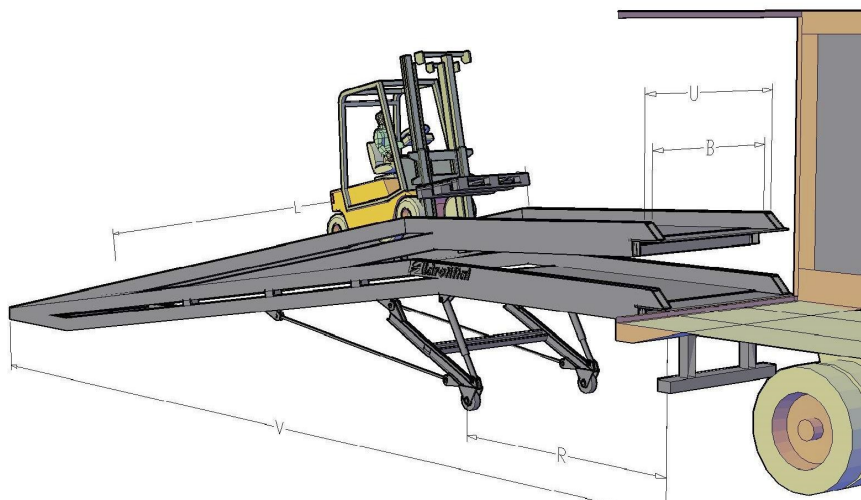


MR 6	Max point of rise	Min point of landing	Gauge width	Trail width	Restrain lenght	Bridge lenght	Max load
	H (mm)	h (mm)	U(mm)	B(mm)	L(mm)	R(mm)	G(kg)
MR6-2000	1450	850	2400	2200	8400	2460	6000
MR6-2200	1450	850	2000	2000	8400	2460	6000


DESCRIPTION



ATTENTION: .Attach the ramp to the truck before loading.



SCHEMA

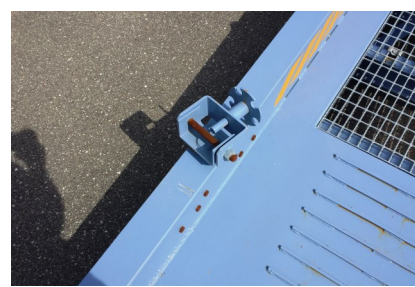

MOBILE RAMPS

Phone: +370 655 40001
 E-mail: info@hidrotiltai.lt
 Web: www.hidrotiltai.lt

Antakalnio 50, 55-asis pastas, p/d
 805, LT-10312, Vilnius,
 LITHUANIA.



Mobile loading ramps

With electric operating . Loading capacity 6

Manufactured
in
LITHUANIA


AVAILABLE OPTIONS

- Hidroelectrical operation
- Main platform with transporter stripe
- Main platform with rollgang
- Traffic light
- Optional color (standard RAL 5014).
- You company logo.

CAPACITY 6T

TECHNICAL SPECIFICATIONS

Made by standard	LST 1570-98
Capacity EN 1398 (kN)	60
Working pressure (MPa)	25
Working temperature °C	-25 +40
Oil	NESTE 32
Oil tank capacity (dm ³)	4

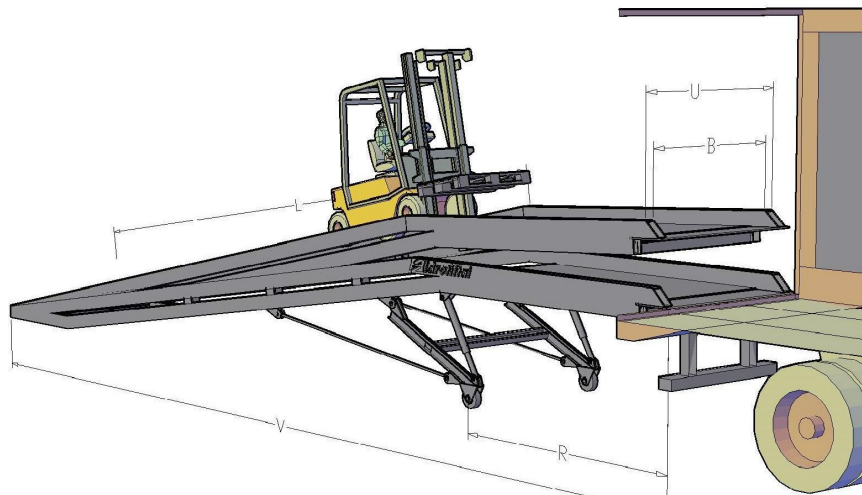


MR 6	Max point of rise	Min point of landing	Gauge width	Trail width	Restraining length	Bridge length	Max load
	H (mm)	h (mm)	U(mm)	B(mm)	L(mm)	R(mm)	G(kg)
MR6-2000	1450	850	2400	2200	8400	2460	6000
MR6-2200	1450	850	2000	2000	8400	2460	6000

DESCRIPTION



ATTENTION: .Attach the ramp to the truck before loading.



SCHEMA

Attachment element



ELECTRICAL SPECIFICATION

- Voltage (V) 24
- Amperage (A) 32
- Power (W) 750

I P 5 5



MOBILE RAMPS

Phone: +370 655 40001
 E-mail: info@hidrotiltai.lt
 Web: www.hidrotiltai.lt

Antakalnio 50, 55-asis pastas, p/d
 805, LT-10312, Vilnius,
 LITHUANIA.



Mobile loading ramps

► Loading capacity 7 tons

Manufacturer
of
LITHUANIA


AVAILABLE OPTIONS

- Hidroelectrical operation
- Main platform with transporter stripe
- Main platform with rollgang
- Traffic light
- Optional color (standard RAL 5014).
- You company logo.

CAPACITY 7T

TECHNICAL SPECIFICATIONS

Made by standard	LST 1570-98
Capacity EN 1398 (kN)	70
Working pressure (MPa)	25
Working temperature °C	-25 +40
Oil	NESTE 32
Oil tank capacity (dm ³)	5

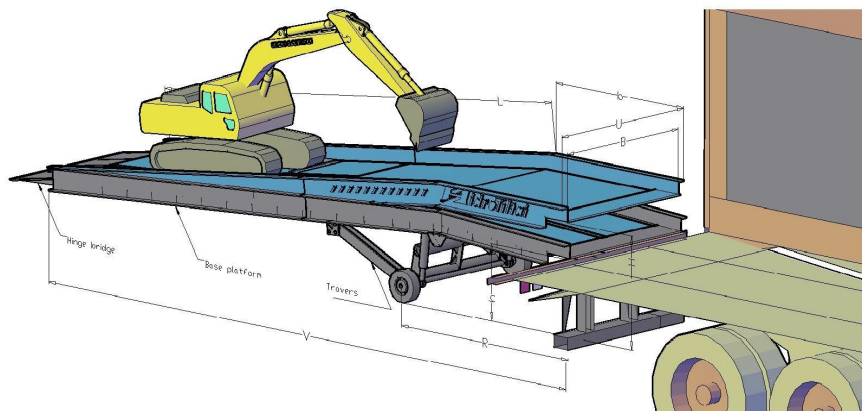

ADVANCED LOADING ASSISTANT

MR 7	Max point of rise	Min point of landing	Gauge width	Trail width	Restrained length	Bridge length	Max load
	H (mm)	h (mm)	U(mm)	B(mm)	L(mm)	R(mm)	G(kg)
MR7-2000	1450	850	2400	2200	8400	2460	7000
MR7-2200	1450	850	2000	2000	8400	2460	7000




ELECTRICAL SPECIFICATION

- Voltage (V) 380
- Amperage (A) 2
- Power (W) 750

I P 5 5

ATTENTION: .Attach the ramp to the truck before loading.



MOBILE RAMPS

Phone: +370 655 40001
E-mail: info@hidrotiltai.lt
Web: www.hidrotiltai.lt

Antakalnių 50, 55-asis pastas, p/d
805, LT-10312, Vilnius,
LITHUANIA.



Mobile loading ramps

▶ Loading capacity 8 tons

Member of
LITHUANA


AVAILABLE OPTIONS

- Hidroelectrical operation
- Main platform with transporter stripe
- Main platform with rollgang
- Traffic light
- Optional color (standard RAL 5014).
- You company logo.

CAPACITY 8T

TECHNICAL SPECIFICATIONS

Made by standard	LST 1570-98
Capacity EN 1398 (kN)	80
Working pressure (MPa)	25
Working temperature °C	-25 +40
Oil	NESTE 32
Oil tank capacity (dm ³)	6

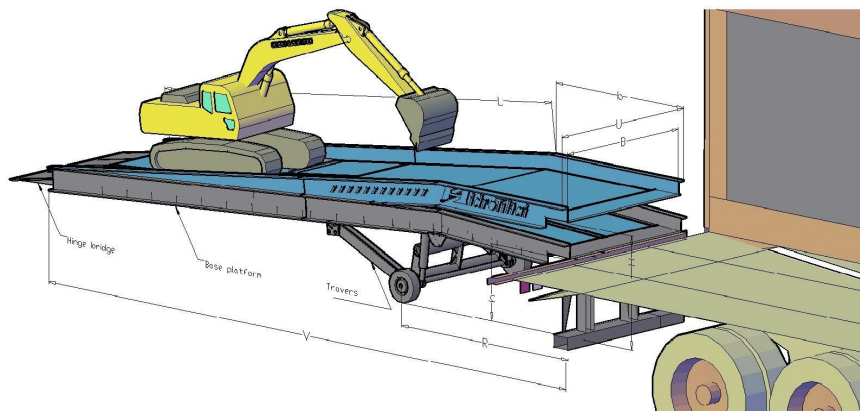


ADVANCED LOADING ASSISTANT

MR 8	Max point of rise	Min point of landing	Gauge width	Trail width	Restraining length	Bridge length	Max load
	H (mm)	h (mm)	U(mm)	B(mm)	L(mm)	R(mm)	G(kg)
MR8-2000	1450	850	2400	2200	8400	2460	8000
MR8-2200	1450	850	2000	2000	8400	2460	8000



Attachment element

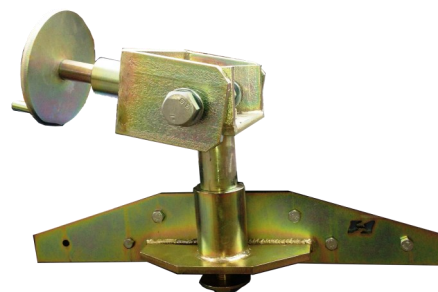

MOBILE RAMPS

Phone: +370 655 40001
E-mail: info@hidrotiltai.lt
Web: www.hidrotiltai.lt

Antakalnių 50, 55-asis pastas, p/d
805, LT-10312, Vilnius,
LITHUANIA.



Mobile loading ramps

▶ Loading capacity 9 tons




AVAILABLE OPTIONS

- Hidroelectrical operation
- Main platform with transporter stripe
- Main platform with rollgang
- Traffic light
- Optional color (standard RAL 5014).
- You company logo.

CAPACITY 9T

TECHNICAL SPECIFICATIONS

Made by standard	LST 1570-98
Capacity EN 1398 (kN)	90
Working pressure (MPa)	25
Working temperature ©	-25 +40
Oil	NESTE 32
Oil tank capacity (dm3)	8

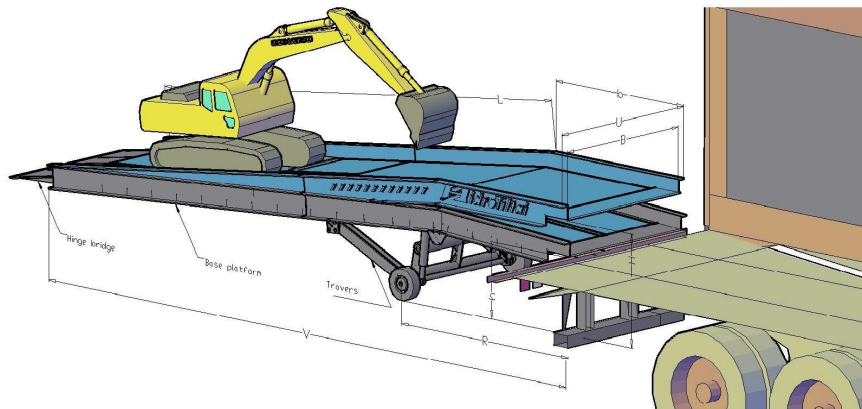



ADVANCED LOADING ASSISTANT

MR 9	Max point of rise	Min point of landing	Gauge width	Trail width	Restrained length	Bridge length	Max load
	H (mm)	h (mm)	U(mm)	B(mm)	L(mm)	R(mm)	G(kg)
MR8-2000	1450	850	2400	2200	8400	2460	9000
MR8-2200	1450	850	2000	2000	8400	2460	9000

DESCRIPTION



SCHEMA

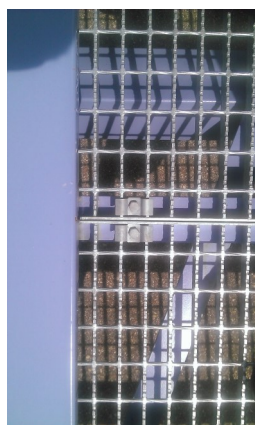

Phone: +370 655 40001
 E-mail: info@hidrotiltai.lt
 Web: www.hidrotiltai.lt

Antakalnio 50, 55-asis pastas, p/d
 805, LT-10312, Vilnius,
 LITHUANIA.

MOBILE RAMPS



Mobile loading ramps

► Loading capacity 10 tons




AVAILABLE OPTIONS

- Hidroelectrical operation
- Main platform with transporter stripe
- Main platform with rollgang
- Traffic light
- Optional color (standard RAL 5014).
- You company logo.

CAPACITY 10T

TECHNICAL SPECIFICATIONS



Made by standard	LST 1570-98
Capacity EN 1398 (kN)	100
Working pressure (MPa)	25
Working temperature °C	-25 +40
Oil	NESTE 32
Oil tank capacity (dm ³)	8

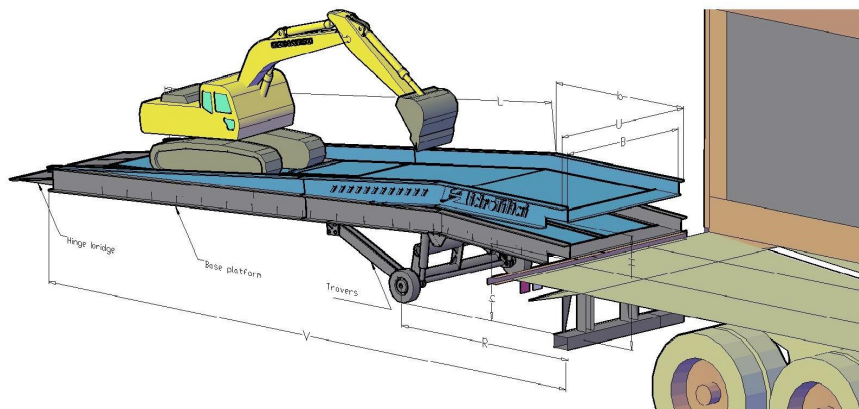

ADVANCED LOADING ASSISTANT

MR 10	Max point of rise	Min point of landing	Gauge width	Trail width	Restraining length	Bridge length	Max load
	H (mm)	h (mm)	U(mm)	B(mm)	L(mm)	R(mm)	G(kg)
MR10-2000	1450	1050	2400	2200	8400	1760	10000
MR10-3200	1450	1050	3200	2000	8400	1760	10000

DESCRIPTION

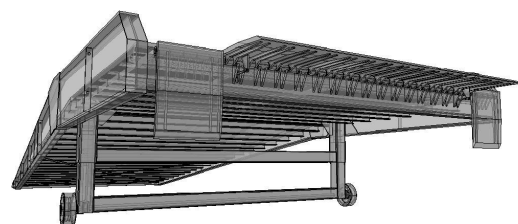

SCHEMA



MOBILE RAMPS

Phone: +370 655 40001
E-mail: info@hidrotiltai.lt
Web: www.hidrotiltai.lt

Antakalnio 50, 55-asis pastas, p/d
805, LT-10312, Vilnius,
LITHUANIA.



Mobile loading ramps

3-direction loading .Loading capacity 6 tons




AVAILABLE OPTIONS

- Hidroelectrical operation
- Main platform with transporter stripe
- Main platform with rollgang
- Traffic light
- Optional color (standard RAL 5014).
- You company logo.

CAPACITY 6T

TECHNICAL SPECIFICATIONS

Made by standard	LST 1570-98
Capacity EN 1398 (kN)	60
Working pressure (MPa)	25
Working temperature °C	-25 +40
Oil	NESTE 32
Oil tank capacity (dm3)	6

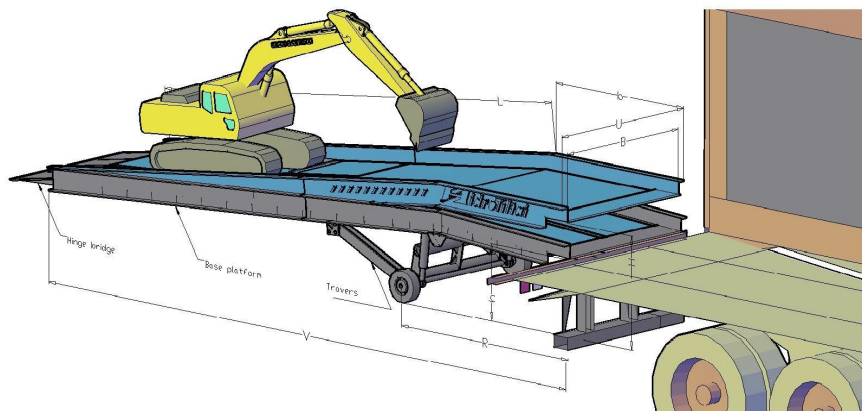


ADVANCED LOADING ASSISTANT

MR 8	Max point of rise	Min point of landing	Gauge width	Trail width	Restraining length	Bridge length	Max load
	H (mm)	h (mm)	U(mm)	B(mm)	L(mm)	R(mm)	G(kg)
3MR6-3200	1450	1050	2400	3200	8400	1760	10000

3-direction loading

DESCRIPTION



SCHEMA




Hydraulic pressure supply



MOBILE RAMPS

Phone: +370 655 40001
 E-mail: info@hidroliftai.lt
 Web: www.hidroliftai.lt

Antakalnio 50, 55-asis pastas, p/d
 805, LT-10312, Vilnius,
 LITHUANIA.

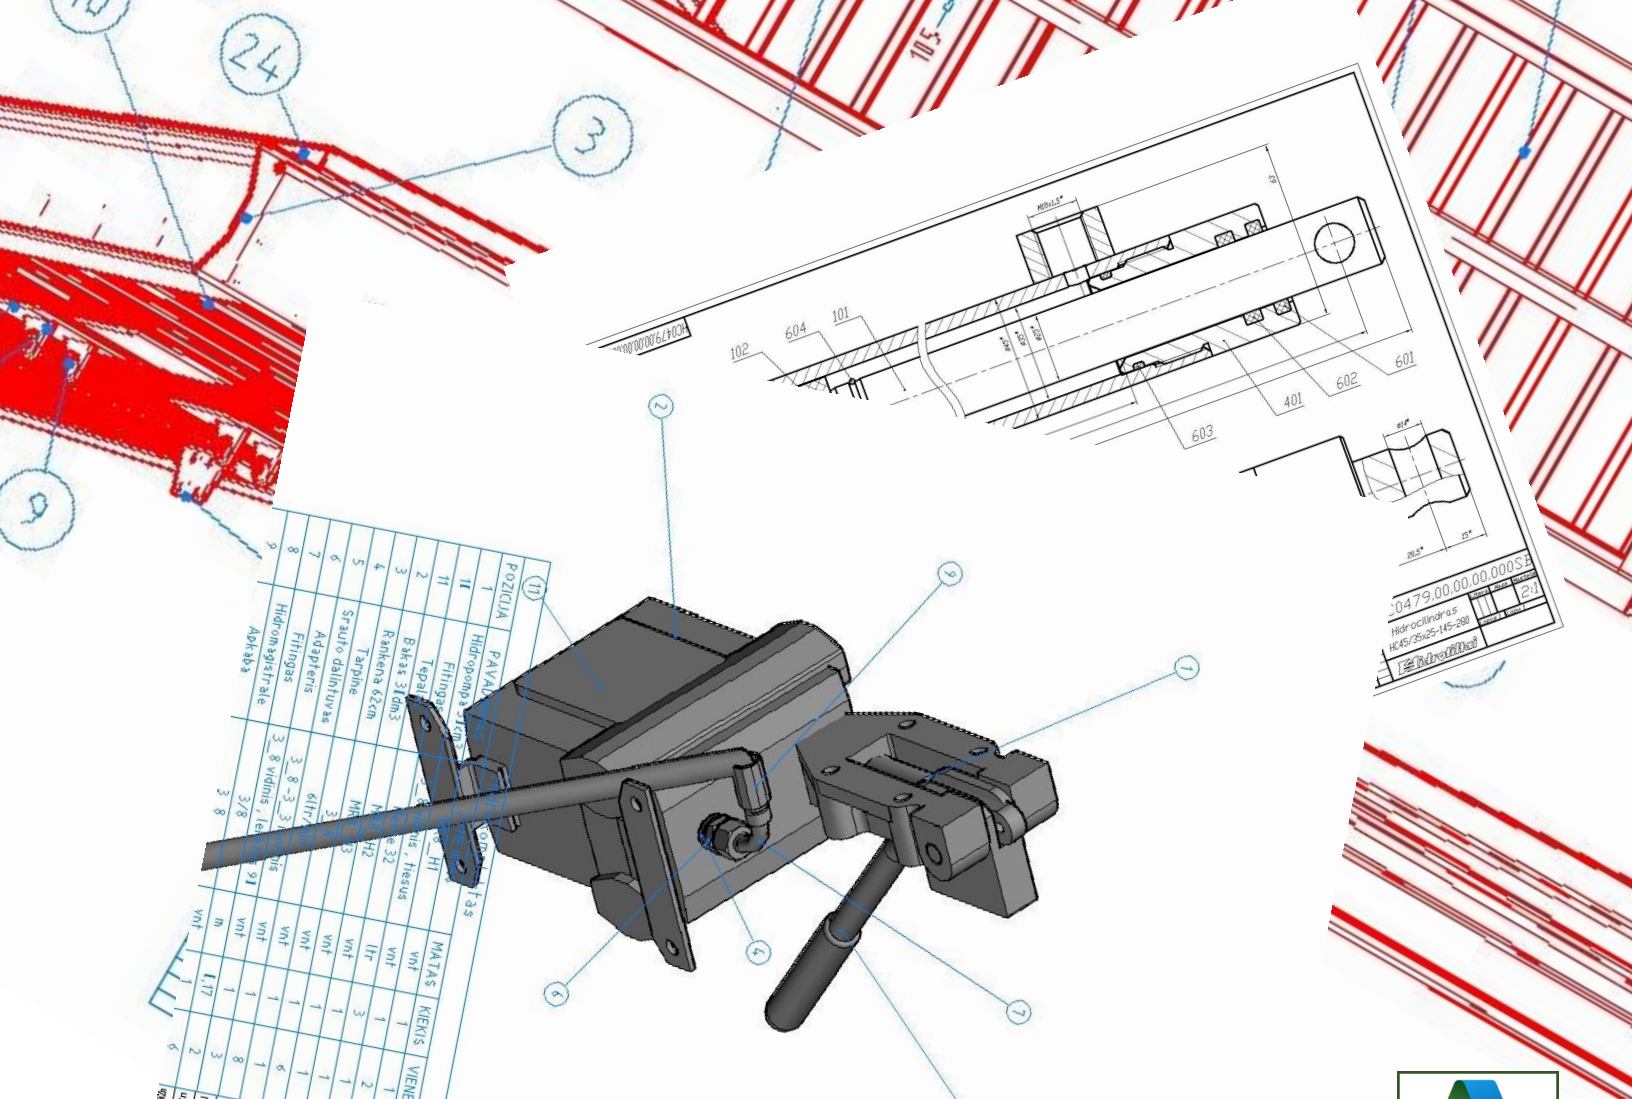

MEDŽIAGA
S355

Hidrotiltai

Platforma
surinkimo brėžinys

DETALES AR MAŽŲ KODŲ

MR8 P



MOBILE RAMPS

Phone: +370 655 40001
E-mail: info@hidrotiltai.lt
Web: www.hidrotiltai.lt

Antakalnio 50, 55-asis pastas, p/d
805, LT-10312, Vilnius,
LITHUANIA.